

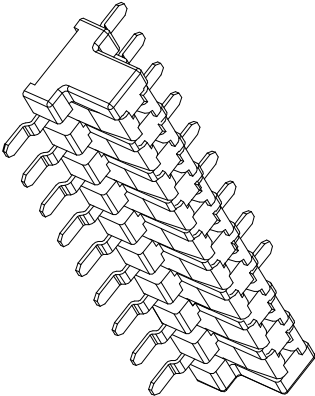
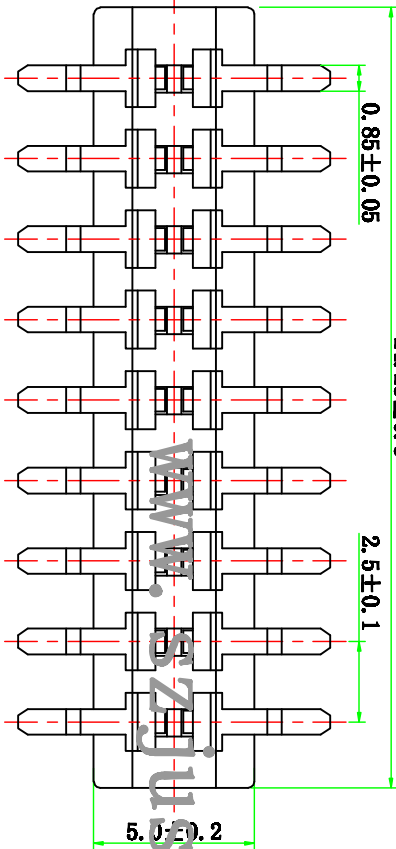
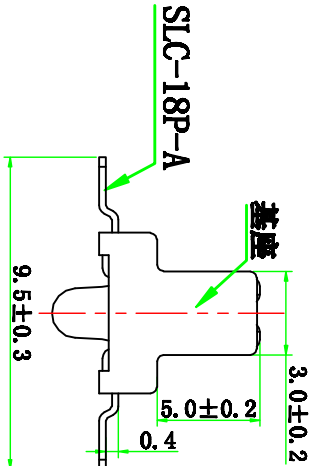


REV	DESCRIPTION	MARK
XI	first edition	

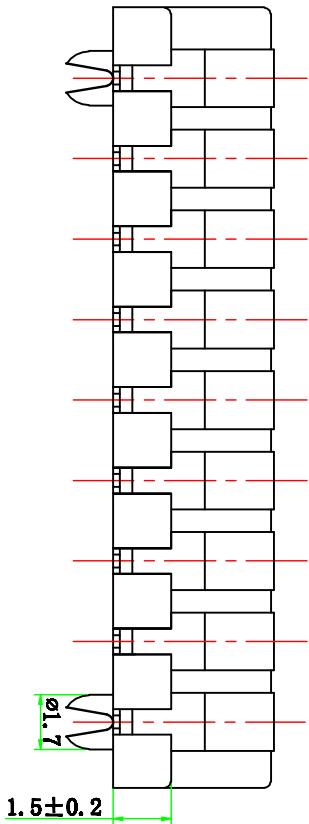

SPECIFICATIONS:

Current rating: 1.0A AC, DC;
Voltage rating: 250V AC, DC;
Withstand voltage: 550VAC/1minute;
Contact resistance:30mΩ Max;
Insulation resistance:1000MΩ Min;
Working temperature:-20℃~+85℃;

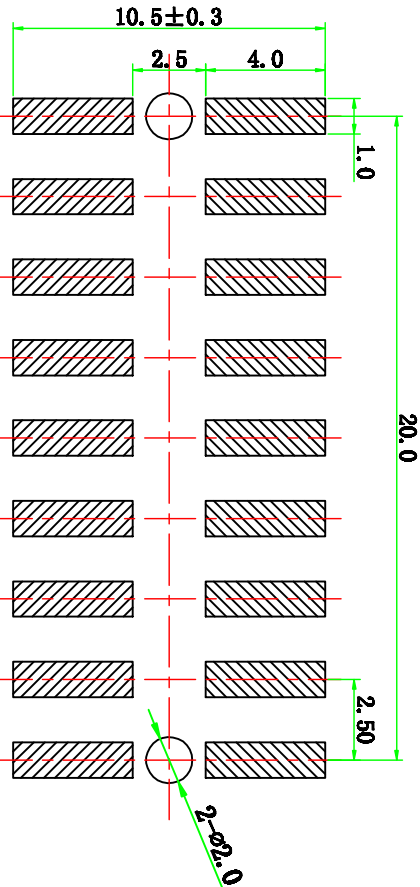

PGB Layout

JUSUN 巨赛实业(深圳)有限公司 JUSAI INDUSTRIAL (SHENZHEN) CO.,LTD		PART NO.: WT1800A(公座)	
L ±	L' ±	MAT'L	APD:
.L ± 0.20	.L' ± 0.1"		
.XL ± 0.10	.XL' ± 0.05"	FINISH	CHD:
.XX ±	.XX' ±		
UNITS:	UNITS:	Q'TY	DR:
		SCALE 1:1	SHEET 1/1
		DATE 2017.08.08	VERSION V1.0
		REV. XI	