
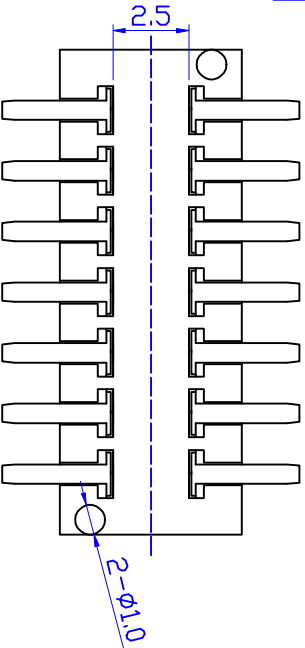
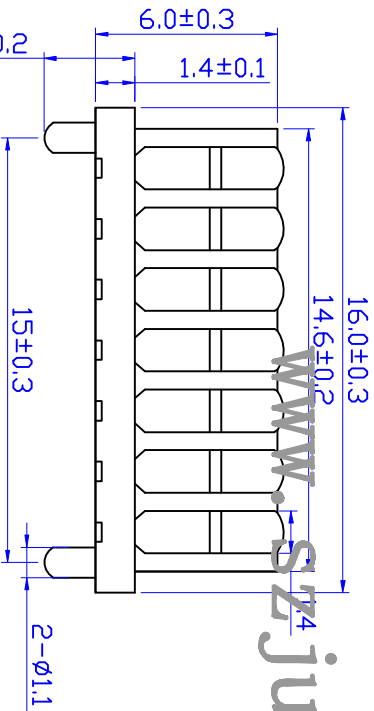
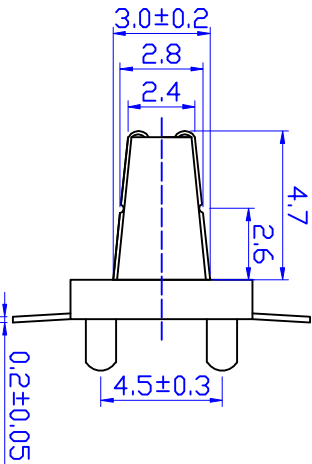


REV	DESCRIPTION	MARK
X1	first edition	

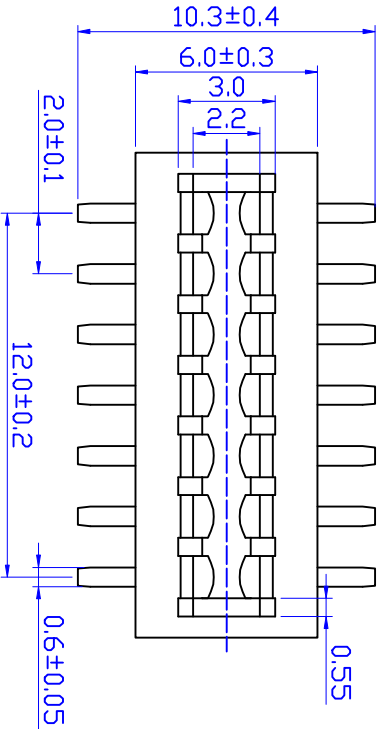

www.szjusun.cn

SPECIFICATIONS:

Current rating: 1.0A AC, DC;
Voltage rating: 250V AC, DC;
Withstand voltage: 550VAC/1Minute;
Contact resistance: 30mΩ Max;
Insulation resistance: 500MΩ Min;
Working temperature: -25℃~+85℃;
MATERIAL:
Housing: PBT, UL94V-0,
Pin: Phosphor Bronze Gold-plated.

炬赛实业(深圳)有限公司 JUSAI INDUSTRIAL (SHENZHEN) CO.,LTD				PART NO: SB1400A(SMT)	
X ±	X' ±	MAT'L	APPLD:	CUS PART NO:	
X ± 0.20	X' ± 0.1°	∕			
XX ± 0.10	XX' ± 0.05°	FINISH	CHKD:	DATE	VERSION
XXX ±	XXX' ±	∕		2017.06.04	V1.0
	UNITS: mm	Q'TY	DR:	SCALE	SHEET
		∕		1:1	1/1
					REV. X1