
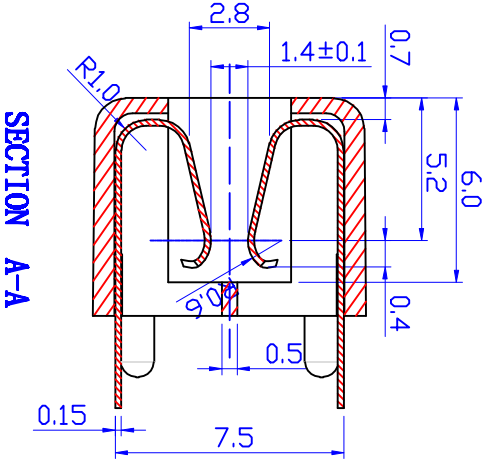
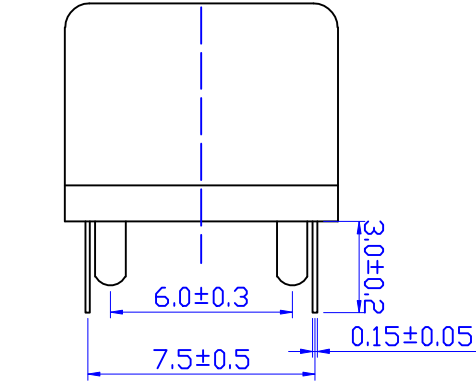


REV	DESCRIPTION	MARK
X1	first edition	

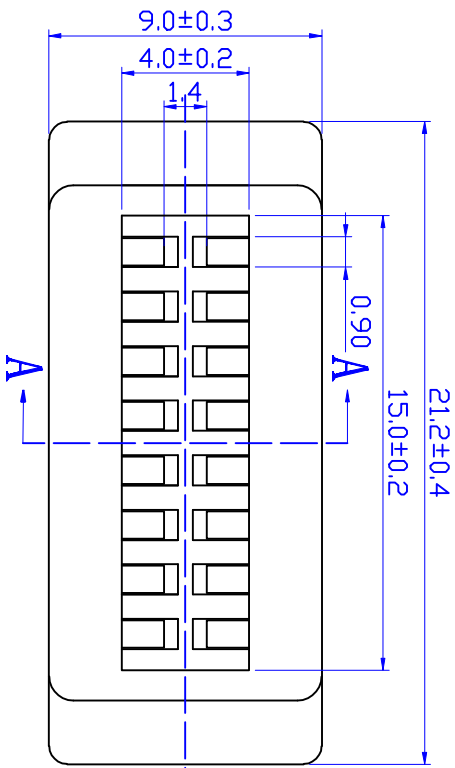


www.szjusun.cn

SPECIFICATIONS:

Current rating: 1.0A AC, DC;
Voltage rating: 250V AC, DC;
Withstand voltage: 550VAC/1Minute;
Contact resistance: 30mΩ Max;
Insulation resistance: 500MΩ Min;
Working temperature: -25℃~+85℃;

MATERIAL:

Housing: PBT, UL94V-0,
Pin: Phosphor Bronze Gold-plated;

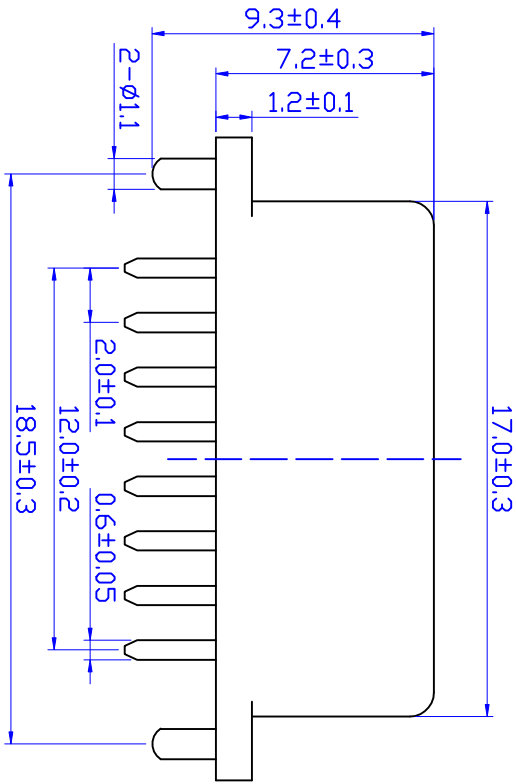

 炬赛实业(深圳)有限公司 JUSAI INDUSTRIAL (SHENZHEN) CO.,LTD				PART NO.:	SB1400B		
X ±	X' ±	MAT'L	APPD:	CUS PART NO.:			
X ± 0.20	X' ± 0.1*	／					
XX ± 0.10	XX' ± 0.05*	FINISH	CHKD:	DATE	2017.04.12	VERSION	V1.0
XXX ±	XXX' ±	／					
	UNITS: mm	Q'TY	DR:	SCALE	1/1	SHEET	1/1
				REV.	X1		