
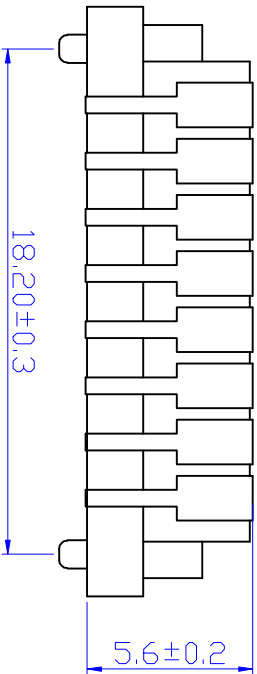
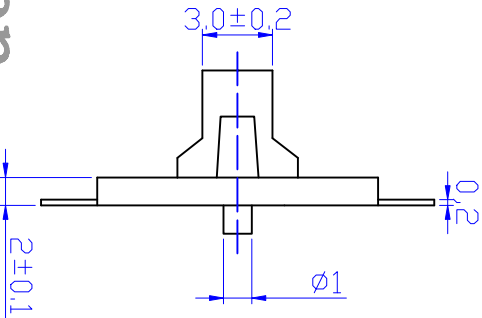


REV	DESCRIPTION	MARK
X1	first edition	

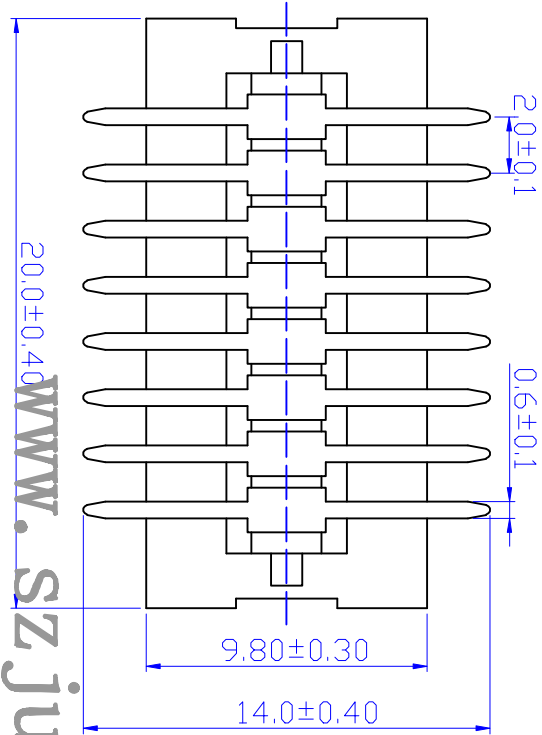

www.szjusun.cn

SPECIFICATIONS:

Current rating: 1.0A AC, DC;
Voltage rating: 250V AC, DC;
Withstand voltage: 550VAC/1minute;
Contact resistance: 30mΩ Max;
Insulation resistance: 500MΩ Min;
Working temperature: -25℃~+85℃;
MATERIAL:
Housing: Nylon46, UL94V-0,
Pin: Phosphor Bronze Gold-plated;

 鉅赛实业(深圳)有限公司 JUSAI INDUSTRIAL (SHENZHEN) CO.,LTD				PART NO.:		SB1600A	
X ±	X' ±	MAT'L	APPD:	CUS PART NO.:			
X ± 0.20	X' ± 0.1*	∕		DATE		VERSION	
.XX ± 0.10	.XX' ± 0.05*	FINISH	CHKD:	2017.04.22		V1.0	
.XXX ± 0.05	.XXX' ±	∕		SCALE		SHEET	
	UNITS: mm	Q'TY	DR:	1/1		REV. X1	