
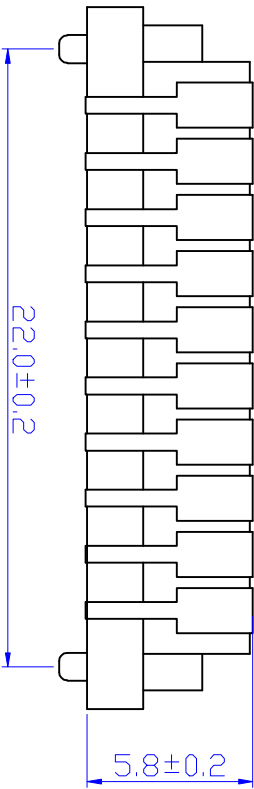
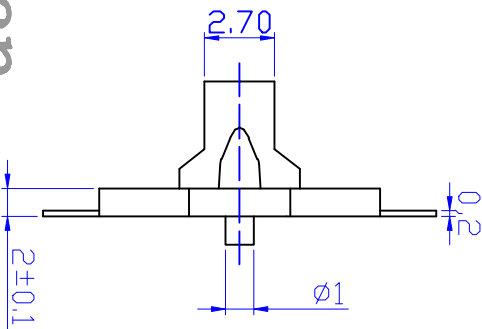


REV	DESCRIPTION	MARK
X1	first edition	

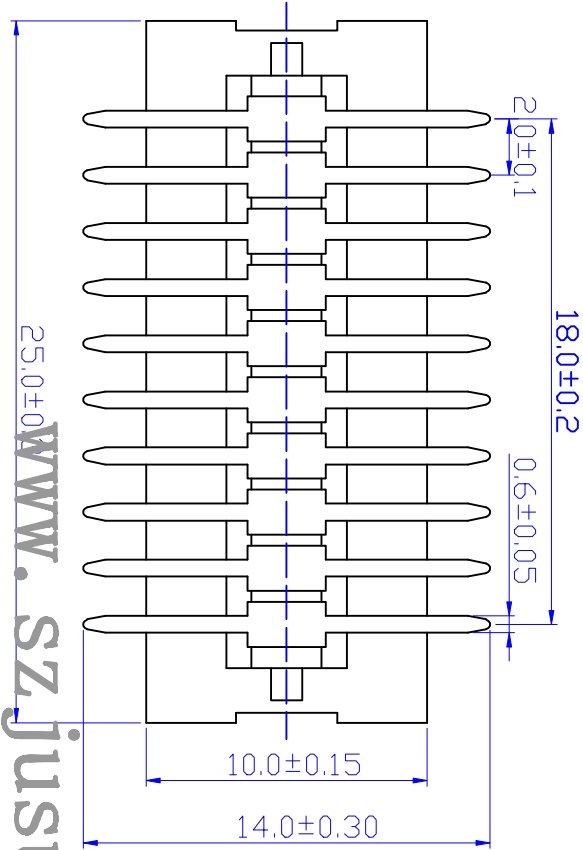

SPECIFICATIONS:

Current rating: 1.0A AC, DC;
Voltage rating: 250V AC, DC;
Withstand voltage: 550VAC/1minute;
Contact resistance: 60mΩ Max;
Insulation resistance: 500MΩ Min;
Working temperature: -25℃~+85℃;
MATERIAL:
Housing: Nylon46, UL94V-0(Black),
Pin: Phosphor Bronze Gold-plated;

 巨赛实业(深圳)有限公司 JUSAI INDUSTRIAL (SHENZHEN) CO.,LTD				PART NO: SB2000A		
X. ±	X'. ±	MAT'L	APPD:	CUS PART NO:		
.X ± 0.20	.X' ± 0.1*	／				
.XX ± 0.10	.XX' ± 0.05*	FINISH	CHKD:	DATE		
.XXX ± 0.05	.XXX' ±	／		2017.08.12		
	UNITS: mm	Q'TY	DR:	SCALE	SHEET	REV.
				1/1	1/1	X1
				VERSION		
				V1.0		