
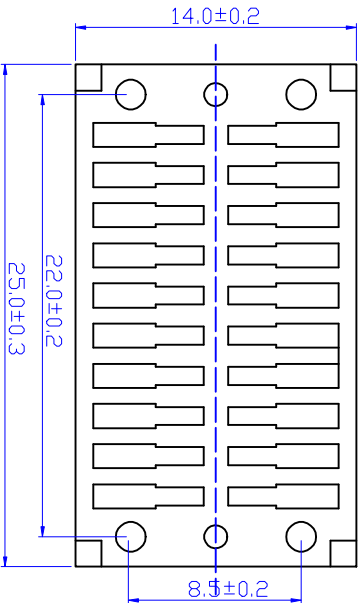

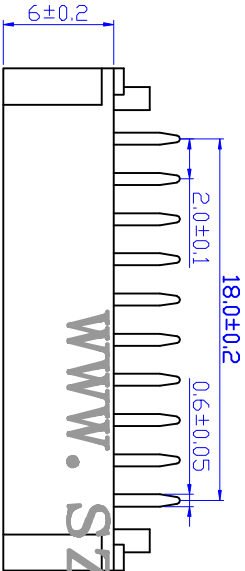


REV	DESCRIPTION	MARK
X1	first edition	

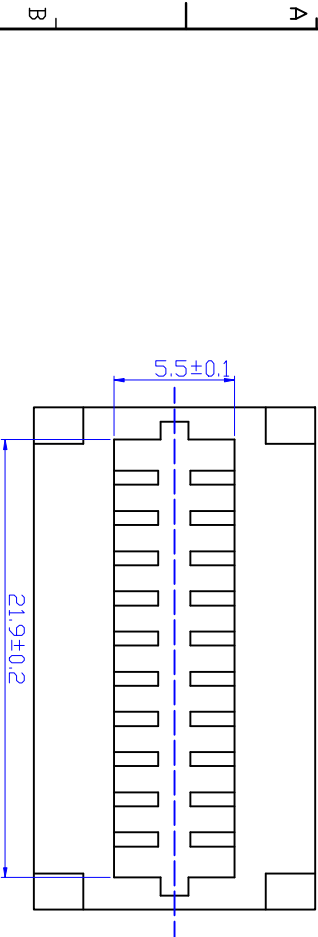

www.szjusun.cn

SPECIFICATIONS:

Current rating: 1.0A AC, DC;
Voltage rating: 250V AC, DC;
Withstand voltage: 550VAC/1minute;
Contact resistance: 60mΩ Max;
Insulation resistance: 500MΩ Min;
Working temperature: -25℃~+85℃;
MATERIAL:
Housing: Nylon46, UL94V-0(Black),
Pin: Phosphor Bronze Gold-plated;

 钰赛实业(深圳)有限公司 JUSAI INDUSTRIAL (SHENZHEN) CO.,LTD				PART NO: SB2000B	
X ±	X' ±	MAT'L	APPD:	CUS PART NO:	
X ± 0.20	X' ± 0.1°	∕			
.XX ± 0.10	.X' ± 0.05°	FINISH	CHKD:	DATE	VERSION
.XXX ± 0.05	.XXX' ±	∕		2017.08.12	V1.0
	UNITS: mm	Q'TY	DR:	SCALE 1:1	SHEET 1/1 REV. X1