
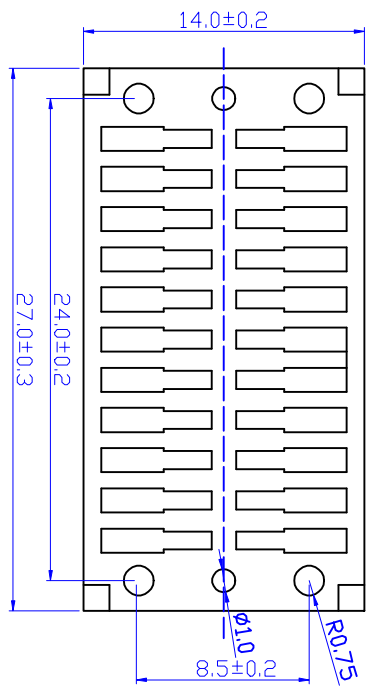

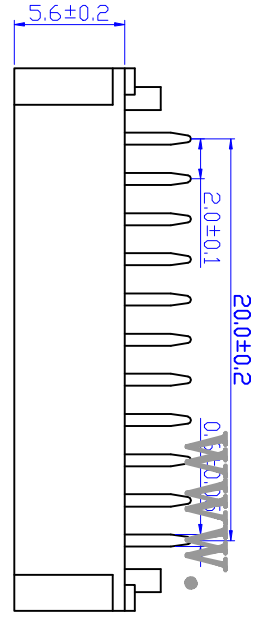


REV	DESCRIPTION	MARK
X1	first edition	

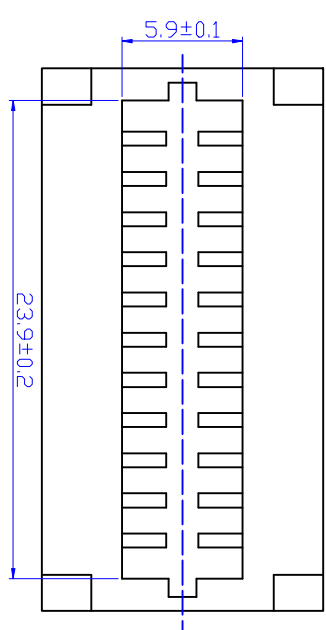

www.szjusun.cn

**SPECIFICATIONS:**

- Current rating: 1.0A AC, DC;
  - Voltage rating: 250V AC, DC;
  - Withstand voltage: 550VAC/1minute;
  - Contact resistance: 60mΩ Max;
  - Insulation resistance: 500MΩ Min;
  - Working temperature: -25℃~+85℃;
- MATERIAL:**  
Housing: Nylon46, UL94V-0,  
Pin: Phosphor Bronze Gold-plated;

<b>巨赛实业(深圳)有限公司</b> JUSAI INDUSTRIAL (SHENZHEN) CO.,LTD		PART NO.: <b>SB2200B 母座</b>		
X ±	X' ±	MAT'L	APPLD:	CUS PART NO.:
X ± 0.20	X' ± 0.1*	∕		
.XX ± 0.10	.XX' ± 0.05*	FINISH	CHKD:	DATE
.XXX ±	.XXX' ±	∕		2017.07.28
UNIT: mm	UNIT: mm	Q'TY	DR:	SCALE
		∕		1:1
				SHEET
				1/1
				REV.
				X1