



REV	DESCRIPTION	MARK
X1	first edition	

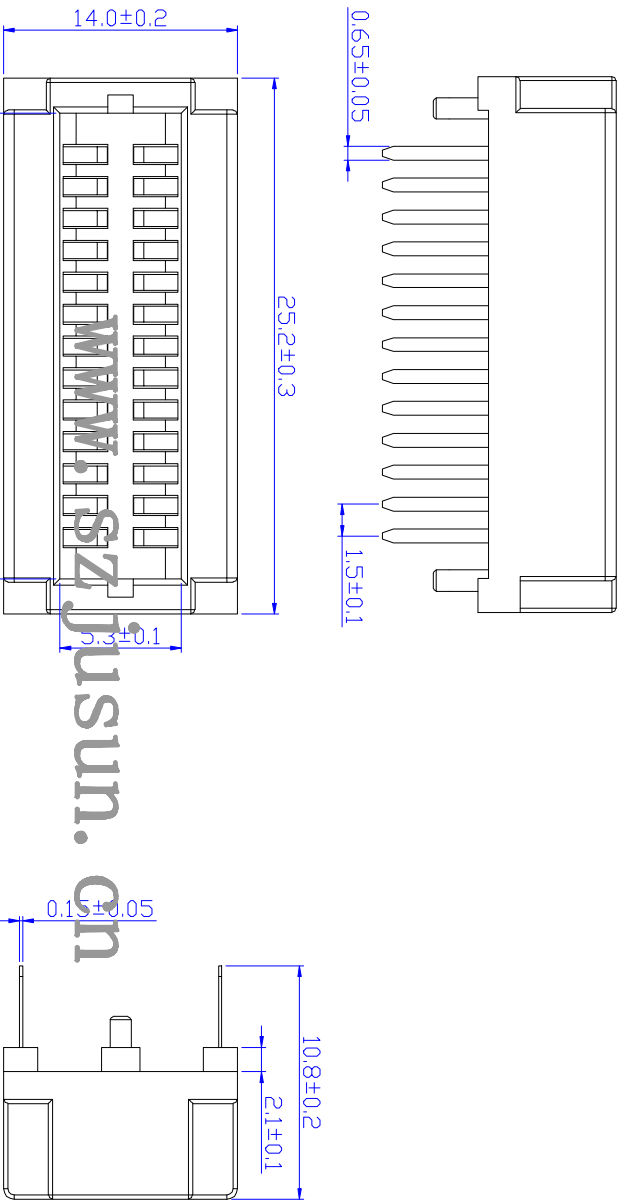

SPECIFICATIONS:

Current rating: 1.0A AC, DC;
Voltage rating: 250V AC, DC;
Withstand voltage: 550VAC/1minute;
Contact resistance:60mΩ Max;
Insulation resistance:500MΩ Min;
Working temperature:-25℃~+85℃;
MATERIAL:
Housing: Nylon46, UL94V-0,
Pin: Phosphor Bronze Gold-plated;

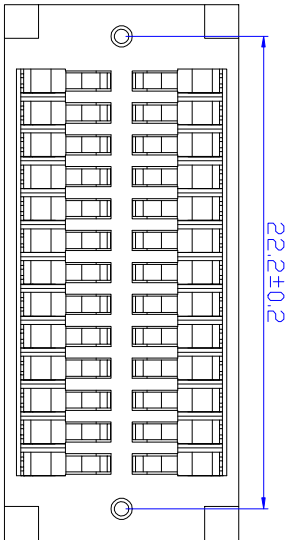

JUSUN 鉅赛实业(深圳)有限公司 JUSAI INDUSTRIAL (SHENZHEN) CO.,LTD				PART NO.: SB2600B	
X ±	X' ±	MAT'L	APPD:	CUS PART NO.:	
X ± 0.20	X' ± 0.1*	✓			
.XX ± 0.10	.XX' ± 0.05*	FINISH	CHKD:	DATE	VERSION
.XXX ± 0.05	.XXX' ±	✓		2017.08.20	V1.0
UNIT: mm	Q'TY	DR:	SCALE	SHEET	REV.
	1/1		1/1	1/1	X1