
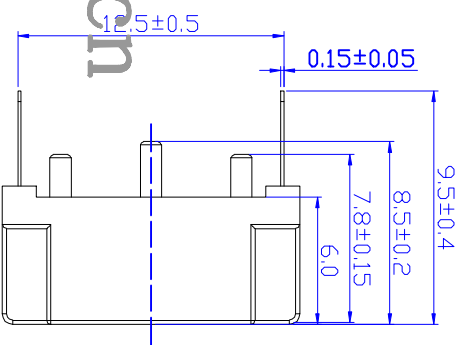


REV	DESCRIPTION	MARK
X1	first edition	

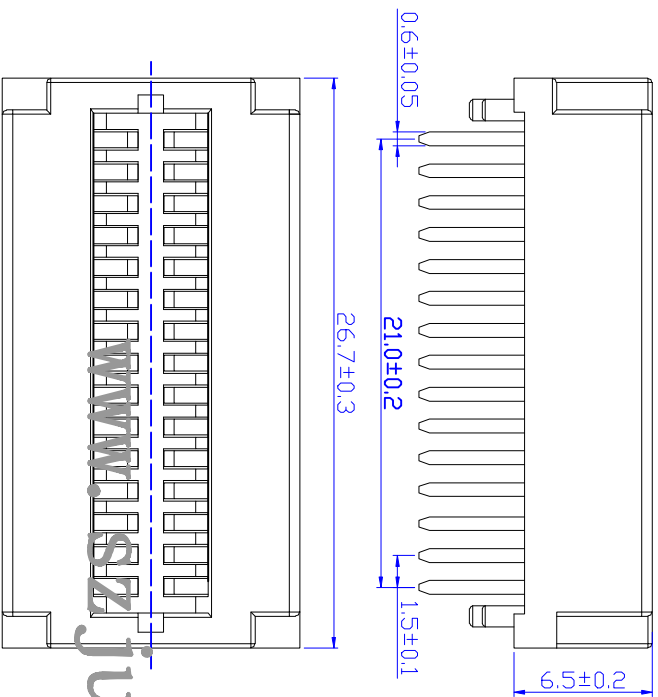

SPECIFICATIONS:

Current rating: 1.0A AC, DC;
Voltage rating: 250V AC, DC;
Withstand voltage: 550VAC/1Minute;
Contact resistance:60mΩ Max;
Insulation resistance:500MΩ Min;
Working temperature: -25℃~+85℃;
MATERIAL:
Housing: Nylon46, UL94V-0,
Pin: berylliumbronze Gold-plated.

JUSUN 钜赛实业(深圳)有限公司		PART NO.:	SB3000B
JUSAI INDUSTRIAL (SHENZHEN) CO.,LTD		APPD:	
MAT'L		CHKD:	
FINISH		DATE	2017.07.31
VERSION		SCALE	1:1
SHEET		REV.	X1

X ±	X' ±	MAT'L	APPD:	PART NO.:	SB3000B
X ± 0.20	X' ± 0.1°	FINISH	CHKD:	DATE	2017.07.31
XX ± 0.10	XX' ± 0.05°	UNIT: mm	Q'TY	SCALE	1:1
XXX ±	XXX' ±	DR:	SHEET	REV.	X1