



Contacts		
	DIM A	DIM B
02	4.70	2.00
03	6.70	4.00
04	8.70	6.00
05	10.70	8.00
06	12.70	10.00
07	14.70	12.00
08	16.70	14.00
09	18.70	16.00
10	20.70	18.00
11	22.70	20.00
12	24.70	22.00
13	26.70	24.00
14	28.70	26.00
15	30.70	28.00
16	32.70	30.00


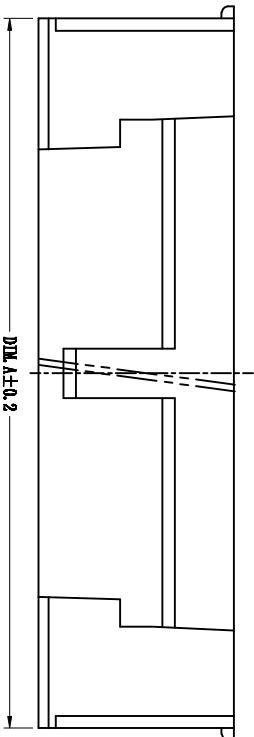


NOTE: UNLESS OTHERWISE SPECIFIED



1. MATERIAL P/N: Nylon, UL94V-0 RATED COLOR WHITE
2. DIM. MARKED ... TO BE CHECKED BY QC
3. AS SHOWN WITH MAX. HEIGHT 0.03 mm ABOVE SURFACE AND THE TEXT HEIGHT IS ABOUT 1.5 mm.

4. THE FOLLOWING CONDITION SHALL BE MET:

- FLASH: 0.03 mm THICK BY 0.05 mm MAX.
- EJECTION MARK: 0.10 mm MAX.
- MISMATCH IN PARTING LINE: 0.05 mm MAX.
- GATE PROTRUSION OR DEPRESSION: 0.05 mm MAX.

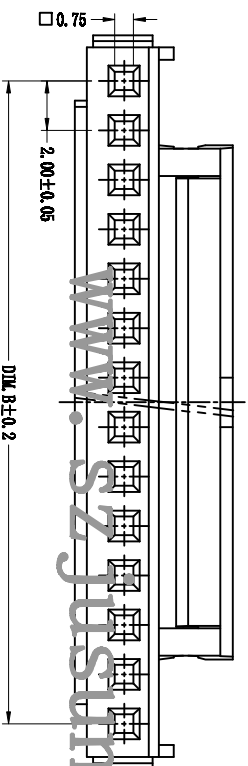

3-16P 专用

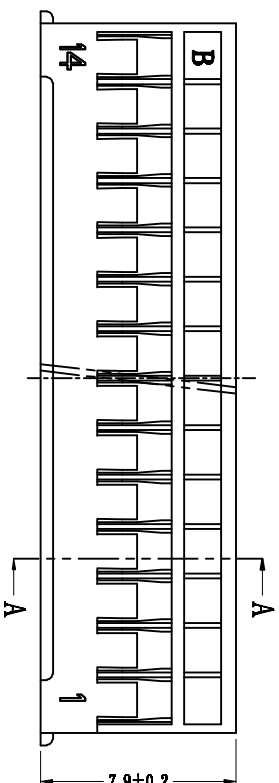

2P 专用

				矩赛实业(深圳)有限公司				TITLE:		
JUSAI INDUSTRIAL (SHENZHEN) CO.,LTD								PHS-nY		
L ±		L' ±	MAT'L	USE:		PART NO.:				
.L ± 0.05		.L' ±		APPD:		DWG NO.:				
.XL ± 0.10		.XL' ±	FINISH							
.XIL ±		.XIL' ±	/		CHKD:		SCALE 1:1			
.XIII ±		.XIII' ±			DR:					
		UNITS: mm	Q'TY		/		SHEET 1/1		REV. XI	