
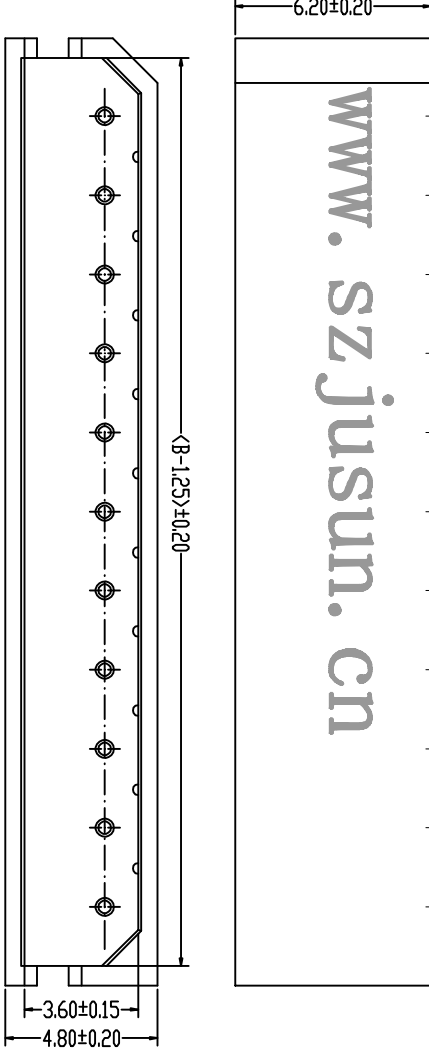
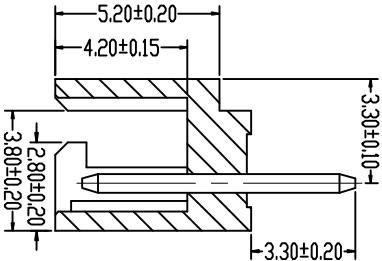
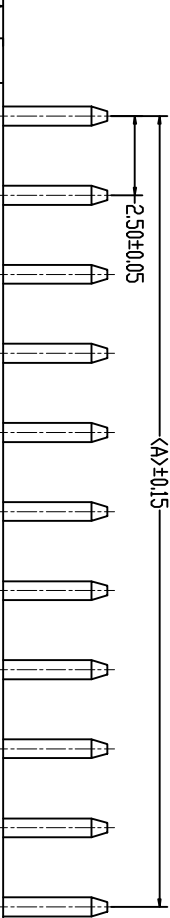



REV	DESCRIPTION	MARK
X1	first edition	

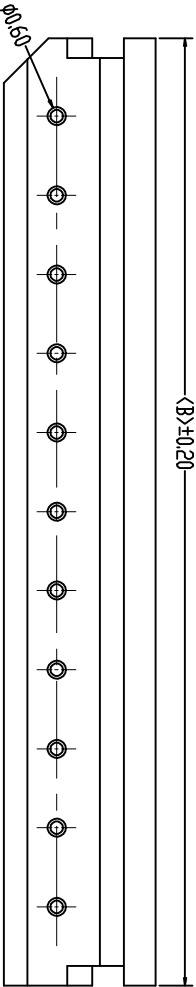

PART NO	Dimensions	
	A	B
5264-2A	2.50	7.45
5264-3A	5.00	9.95
5264-4A	7.50	12.45
5264-5A	10.00	14.95
5264-6A	12.50	17.45
5264-7A	15.00	19.95
5264-8A	17.50	22.45
5264-9A	20.00	24.95
5264-10A	22.50	27.45
5264-11A	25.00	29.95
5264-12A	27.50	32.45
5264-13A	30.00	34.95
5264-14A	32.50	37.45
5264-15A	35.00	39.95
5264-16A	37.50	42.45
5264-17A	40.00	44.95

性能:

额定电流: 2.0A
额定电压: 250V
耐电压: 1000V
绝缘电阻: 1000MΩ
接触电阻: 30mΩ
工作温度: -20℃~+85℃
胶壳(材质): PA66, UL94V-0
端子(材质): 磷青铜, 镀锡



P.C.B LAYOUT

JUSUN 巨赛实业(深圳)有限公司 JUSAI INDUSTRIAL (SHENZHEN) CO.,LTD		PART NAME: 5264-1A	
X ±	X' ±	MAT'L	APPD:
X ± 0.2	X' ± 0.1*	FINISH	CHKD:
.XX ± 0.1	.XX' ± 0.05*	Q'TY	DR:
.XXX ±	.XXX' ±	SCALE 1:1	SHEET 1/1
UNITS: mm		REV. X1	
DATE 2016.07.22		VERSION V1.0	