
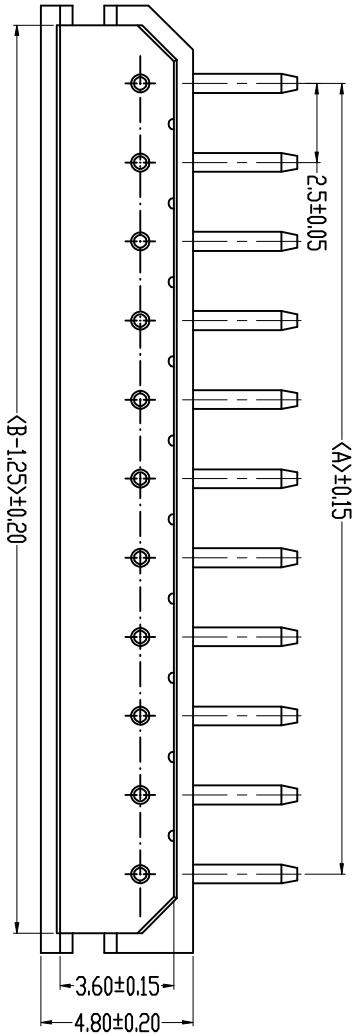
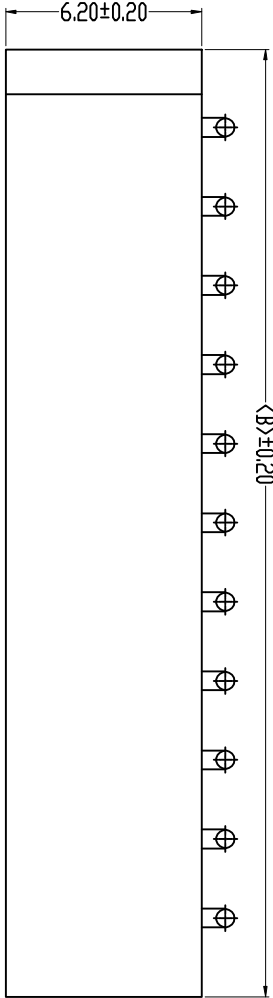



REV	DESCRIPTION	MARK
X1	first edition	

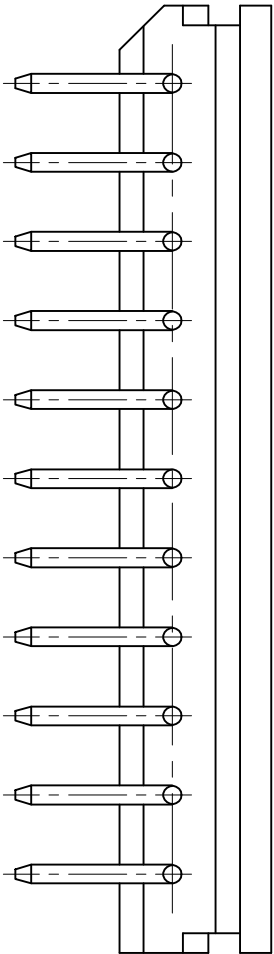

PART NO	Dimensions	
	A	B
5264-2AW	2.50	7.45
5264-3AW	5.00	9.95
5264-4AW	7.50	12.45
5264-5AW	10.00	14.95
5264-6AW	12.50	17.45
5264-7AW	15.00	19.95
5264-8AW	17.50	22.45
5264-9AW	20.00	24.95
5264-10AW	22.50	27.45
5264-11AW	25.00	29.95
5264-12AW	27.50	32.45
5264-13AW	30.00	34.95
5264-14AW	32.50	37.45
5264-15AW	35.00	39.95
5264-16AW	37.50	42.45
5264-17AW	40.00	44.95

性能:
额定电流: 2.0A
额定电压: 250V
耐电压: 1000V
绝缘电阻: 1000MΩ
接触电阻: 30mΩ
工作温度: -20℃~+85℃

胶壳(材质): PA66, UL94V-0
端子(材质): 磷青铜, 镀锡



P.C.B LAYOUT

JUSUN 巨赛实业(深圳)有限公司 JUSUN INDUSTRIAL (SHENZHEN) CO.,LTD				PART NAME: 5264-11AW	
X ±	X' ±	MAT'L	APPD:	PART NO.:	
X ± 0.2	X' ± 0.1*	✓			
XX ± 0.1	XX' ± 0.05*	FINISH	CHKD:	DATE 2016.07.22	
XXX ±	XXX' ±	✓		VERSION V1.0	
UNIT: mm	Q'TY	DR:		SCALE 1:1	SHEET 1/1
				REV. X1	